


decking

Deck Lok™ Dealer Benefits: Quality, Support and Satisfied Customers

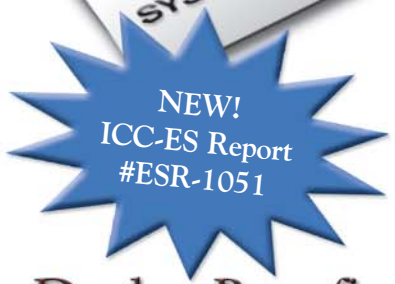

At Royal Crown, we're focused not only on meeting customer needs, but also on achieving our partners' high standards for quality and ease of installation. As a Deck Lok dealer, you'll discover that our distinctive features will provide customers *and* you with unique benefits.

Deck Lok Features:

Dealer Benefits:



Patented connection system

Easy installation and pattern design.

The total package (railings, trim *and* columns)

A wide variety of matching products that will help you meet all of your customers' exterior design needs.

Dura Tri-Extrusion Technology with UV inhibitors

A strong, durable product that won't discolor or split like wood. Your customers will enjoy it for years — and will recommend you to their friends and neighbors!

Patented two-sided planks, each with two contrasting colors and random, nonrepetitive variegated patterns

Less inventory for you to stock.

All-new dealer support materials


Thorough information that will help you market Deck Lok to your customers!

Produced by Royal Crown Limited

As a member of North America's largest vinyl manufacturer, we're a name you can trust for outstanding quality and great design.

In compliance with ICC-ES tests

The only vinyl decking system to earn compliance from ICC-ES (Report #ESR-1051) in tests of strength, durability and quality that meet IBC, IRC and UBC requirements.

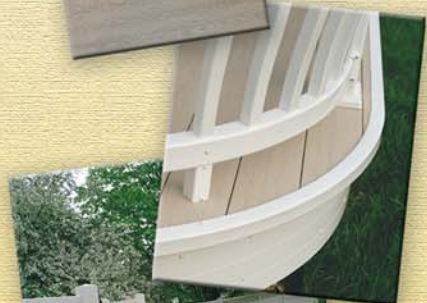

Deck Lok™ Specifications

ICC-ES Report #ESR-1051

Design Criteria:

- 24" maximum stringer spacing
- Plank size = 5.875" wide x 1.5" tall
- Weight = 1.39 lbs. per linear foot
- Coefficient of friction — ASTM C 1028 1.08 (dry), 0.79 (wet)
- Unsupported overhang = 4"
- Note: due to Deck Lok's unique manufacturing process, random selection of boards is necessary when installing larger jobs to achieve an ideal wood grain effect.

Uniform Loading:

L/180

- 24" o.c. supports — boards 45 deg. to framing = 80.5 psf
- 24" o.c. supports — boards 90 deg. to framing = 125.3 psf

L/240

- 24" o.c. supports — boards 45 deg. to framing = 50.9 psf
- 24" o.c. supports — boards 90 deg. to framing = 81.7 psf



Railing Specifications

Key Features of Royal Crown Railing Systems:

- 36" or 42" railing heights
- Nontoxic vinyl to eliminate the need for chemical treatments, paint and/or wood sealants
- Reinforcements to further strengthen durable vinyl components
- Strong, hidden rail lock connectors to secure rails to posts
- Heavy-duty mounting hardware to anchor posts to your Deck Lok deck, or to concrete or wood surfaces
- 6', 8' or 10' lengths
- White, tan, clay and gray color options

See the ICC Legacy Report NER-705 for specific styles included.

Warranty

Royal Crown Limited products carry a Limited Lifetime Transferable Warranty against abnormal weathering and discoloration. No other alternative vinyl product offers a better warranty. A comprehensive 20-year warranty is available on commercial applications.



Royal Crown Limited

800.488.5245 www.DeckLok.com

